

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
4 August 2005 (04.08.2005)


PCT

(10) International Publication Number  
**WO 2005/071256 A1**

- (51) International Patent Classification<sup>7</sup>: F03B 5/00, 13/04, B23Q 5/06
- (21) International Application Number: PCT/CZ2004/000090
- (22) International Filing Date: 23 December 2004 (23.12.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: PUV 2004-14999 23 January 2004 (23.01.2004) CZ
- (71) Applicant and  
(72) Inventor: SIMERA, Miroslav [CZ/CZ]; Hvozdikova 2884/2, 106 00 Praha 10 (CZ).
- (74) Agents: ANDERA, Jiri et al.; Rott, Ruzicka & Guttmann, P.O. Box 94, 170 00 Praha 7 (CZ).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: ROLLING FLUID MACHINE ESPECIALLY WITH A LIQUID SPRAYING AT THE OUTPUT

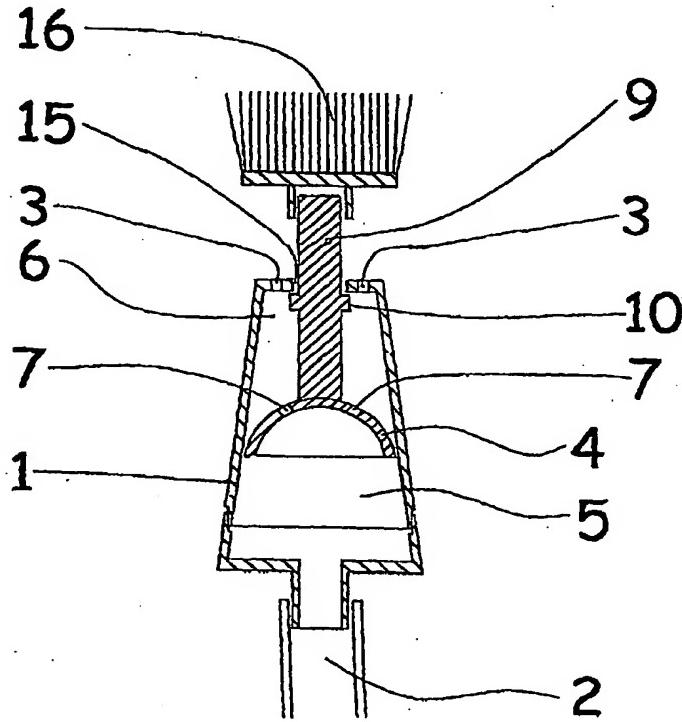

(57) Abstract: A rolling fluid machine especially with a liquid spraying at the output, comprising a chamber (1) where at least a part of its inner surface has a rotary shape and the chamber (1) is provided with at least one inlet (2) of fluid and at least one outlet (3) of fluid. In the chamber (1) there is a rolling rotor (4) installed in a manner enabling rolling and swinging. In the chamber (1) the space (5) bellow the rotor (4) and the space (6) above the rotor (4) are interconnected by at least one additional channel (7).

WO 2005/071256 A1



**Declaration under Rule 4.17:**

— *of inventorship (Rule 4.17(iv)) for US only*

**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*